CLOSED VERSION

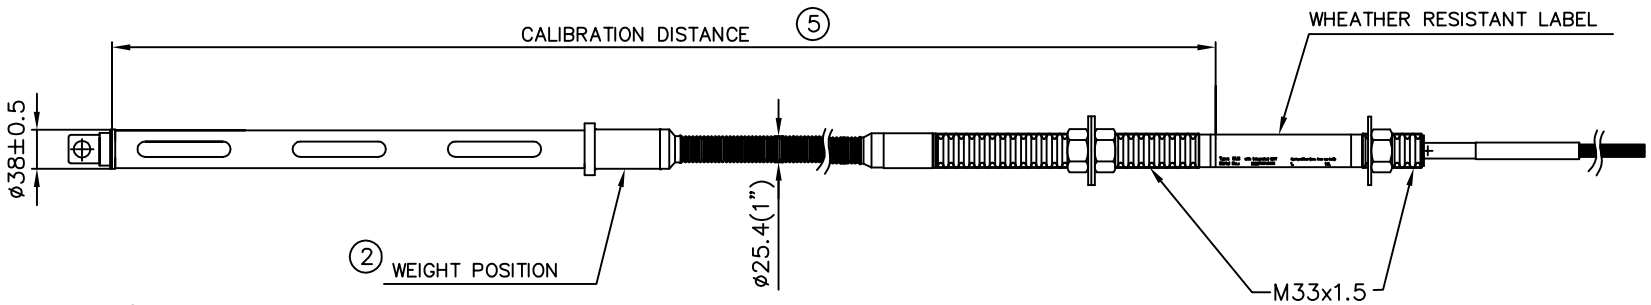

OPEN VERSION

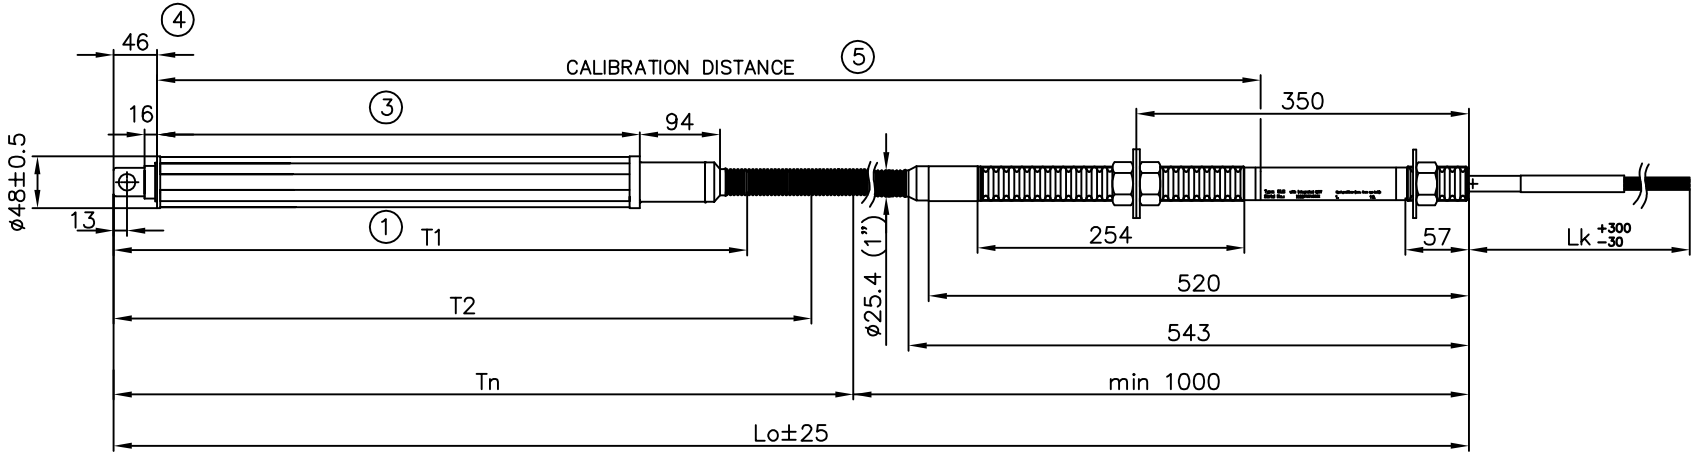

CABEL MARKING

MST/SPOT NO	
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Violet
8	Grey
9	White
10	Pink
Common return	Black

WLS	
+	Brown
−	White
Gnd	Shield

OPTIONS

MST/SPOT NO	
11	Brown / Black
12	Red / Black
13	Orange / Black
14	Yellow / Black

① T1 300mm FROM EYE BOLT IN LEVEL SENSOR

② POSSIBILITY EXIST TO SPECIFY WEIGHT FOR MOUNTING ON TOPSIDE OF WLS. WEIGHT DIA: 80mm/WEIGHT: 5KG. RECOMENDED ANCHOR WEIGHT 3–15KG DEPENT ON INSTALLATION TYPE

③ ACTIVE PROBE LENGTH (500, 1000, OPTIONAL 1500)

④ DISTANCE TO BUTTOM CAN BE REDUCED TO 16mm BY REMOVING THE EYEBOLT

⑤ CALIBRATION DISTANCE TO BE USED FOR ZERO ADJUSTMENT
DISTANCE IS FOUND ABOVE THE LINE IN THE TOP OF THE SENSOR

ISSUED BY	WEEK	PRODUCT CODE	FILE	INSTALLATION DRAWING TITLE
GSP–AJ	0150	REX	ACAD	WATER LEVEL SENSOR (WLS)
APPROVED BY	WEEK	ORIGINAL DWG NO.	SCALE	
GSP	0150	9261 090–150	–	

ROSEMOUNT Tank Gauging

1 ST ANGLE	DOC TYPE	DWG NO.	ISSUE	SHEET
	2	9261 090–150	5	1/1

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BROUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. ROSEMOUNT TANK RADAR AB, SWEDEN.

INST. DWG. A3 070213