REAR VIEW SHOWING CONNECTION DETAILS CONNECTORS 1 to 32

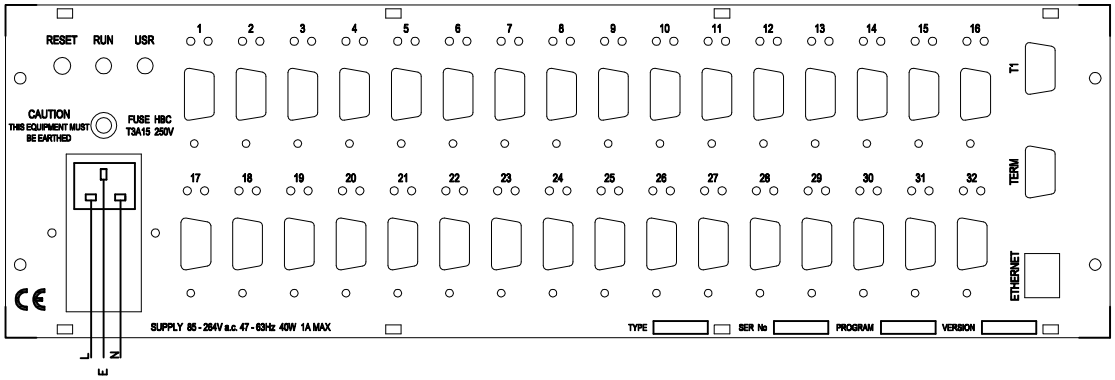

85/240V
47–63Hz
50VA

TANK ID	PORT	GAUGE	DAU/FDI/OS*

* DAU: DATA ACQ UNIT (ROSEMOUNT)
FDI: FIELD DISPLAY INTERFACE (ENRAF)
OS: OUTSTATION (WHESSOE)

3 PIN MALE PHOENIX CONNECTORS ON PANEL

CONNECTION DETAILS FOR CONNECTORS 1 TO 32

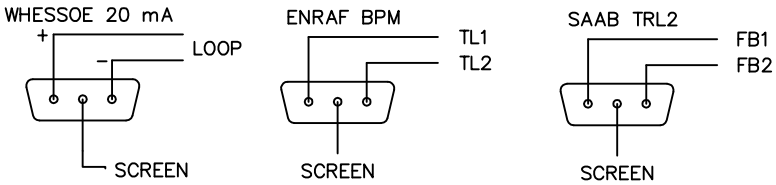

9 PIN 'D' TYPE PLUG ON PANEL



PIN	RS232	RS485	RS422
2	RXD	–	TX+
3	TXD	TD+	RX+
5	GND	GND	GND
7	RTS	–	TX–
8	CTS	TD–	RX–

ETHERNET
CONNECTION
DETAILS



RJ45
SHIELDED SOCKET

ISSUED BY	WEEK	PRODUCT CODE	FILE	INSTALLATION DRAWING TITLE
GSP–AJ	0542	REX	ACAD	EL INSTALLATION DRAWING FCU 2175
APPROVED BY	WEEK	ORIGINAL DWG NO.	SCALE	
GSP–FC	0542	9261 020–022	–	

ROSEMOUNT
Tank Gauging

1 ST ANGLE	DOC TYPE	DWG NO.	ISSUE	SHEET
	1	9261 020–022	2	1/1

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BROUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. ROSEMOUNT TANK RADAR AB, SWEDEN.

INST. DWG. A3 070213